

PakTech[®]

MPA 30i flex


MPA 30I FLEX FEATURES

- Dual axis pick and place layout
- Two-position magazine shuttle
- 6-10 minute handle reload cycle per magazine (typical)
- Up to 30 cycles per minute
- Selectable in-line bypass mode to allow product to pass through MPA30i Flex
- Tool-less change parts for different handle and product combinations
- Remote assistance connectivity is standard*
- UL listed and CE certified industrial controls

*On Demand Handle Application
Optimized to Meet Customer's
Required Output Rate*



*HMI Touch Screen
with Status and Alarm Messaging
and I/O Status Screens*

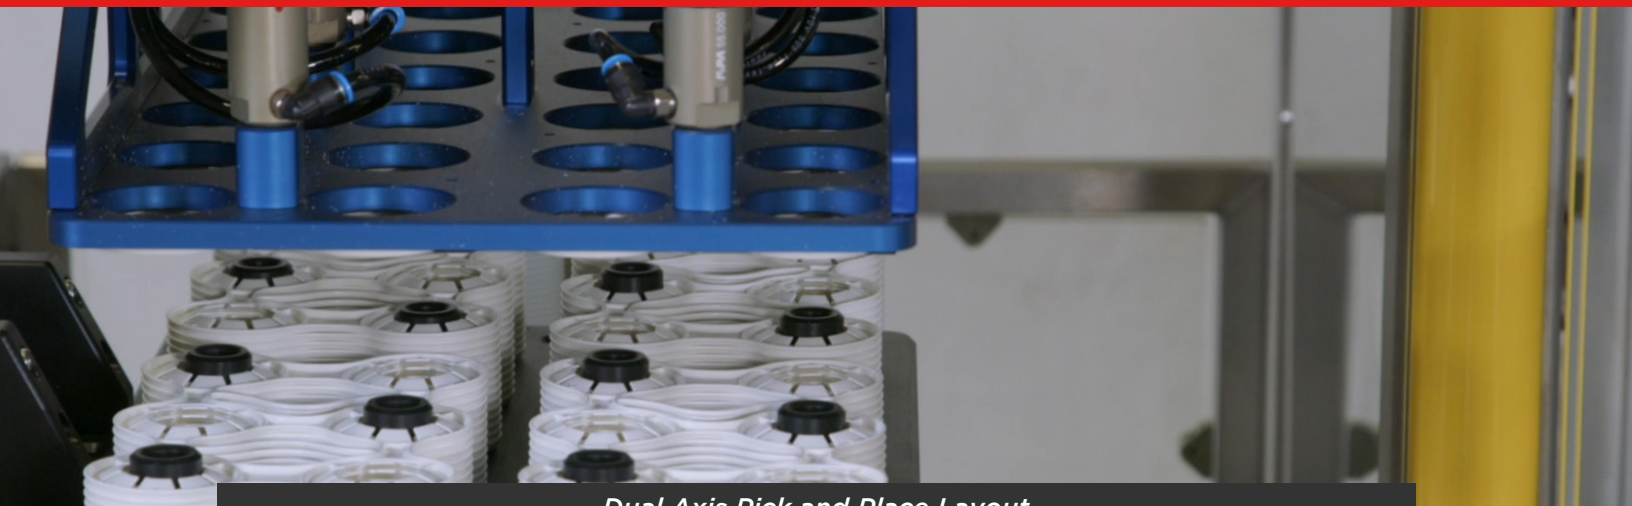


Dual Axis Pick and Place Layout



Touch Screen Panel View HMI



Category III-PLD Safety System

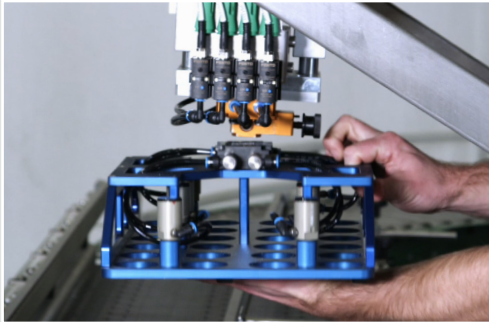


Quick Connect Change Parts



Light Curtains Safety Elements



Flexible Packaging Options for a Variety of Products

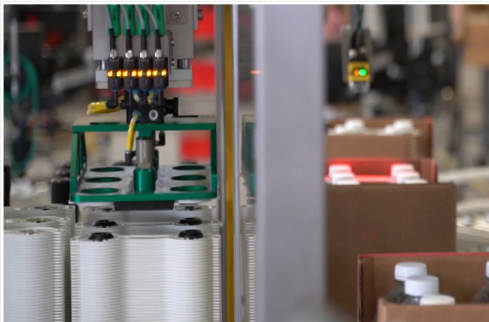

Automatic Handle Magazine Shuttle